


Oil Mist Separator AOM/AOS

Clears all types of haze

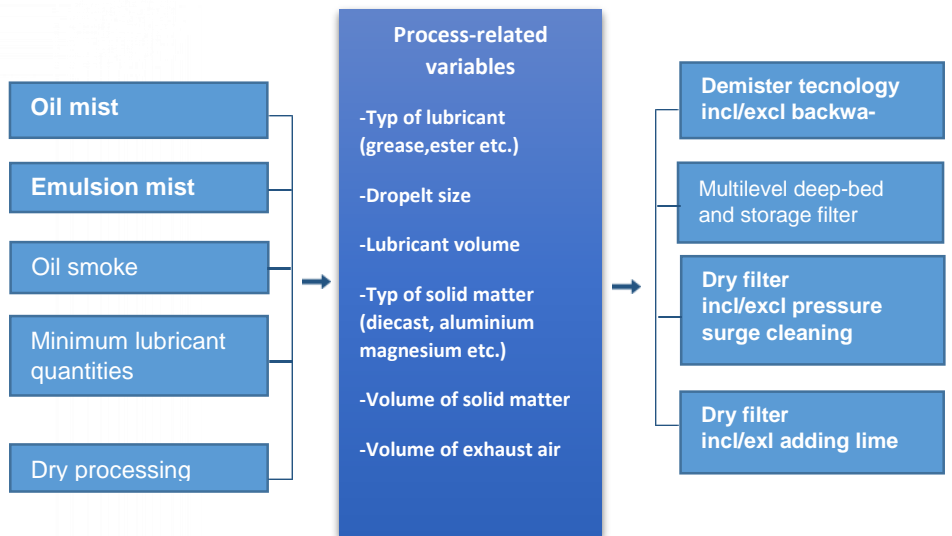

The bg filtration gmbh offers a custom range of filter-types for separating droplets and emulsions, as encountered in metal processing, drilling, cutting, honing, grinding, etc. With these manufacturing processes, varying quantities of various cooling materials and lubricants are used, which in turn create varied spectra of drops.

These fluids blend together with the metals that are to be processed a multitude of implementation combinations. For these countless applications, bg filtration gmbh has developed a filter program with demister technology (which can be with or without backwashing) and multi-level storage and dry filters.

Application in various industrial sectors

- Machining causing the separation of shavings such as drilling, turning, milling, honing, polishing, etc.
- Shaving-free reshaping such as rolling, deep-drawing, pressing, etc.
- Machine tool manufacturing
- Machining centres
- Rolling mills for metals and mouldings
- Metal machining

Advantages

- Maximum filtration capacity even with droplets < 1 µm
- Multi-level, modular structure
- Quick clamping device
- Low maintenance operation
- Energy-efficient

bg filtration gmbh

Voithstr. 5
71272 Renningen, Deutschland
Fon +49 7159 8069-0
Fax +49 7159 7933
Info@bg-filtration.de

Kreissparkasse Böblingen
BLZ 603 501 30
Kto 118174
BIC BKKRDE66
IBAN DE66 6035 0130 0000 118174

HRB 744965
Amtsgericht Stuttgart
Geschäftsführer
Dr. Volker Bauer

Functionality of the filter technology

Filter with demister technology

The single level demister are mainly used for coarser drop spectra. The level can be regenerated, i.e. used with backwashing, depending on the solid matter and the lubricant volume.


Filter with multi-level storage technology

The multi-level storage filters are used in a wide range of drops and are characterised by extremely high and constant separation yields. The special filter cartridges with inserted drainage elements provide a long service life, even with higher quantities of lubricants.

Dry filter with pressure surge-controlled cleaning

Dry filters are used when the droplets deposit onto the solid matter causing no further droplets to reach the filter. These filters are equipped with filter pockets, which can be cleaned off using pressure surges (see AAS series)

Use of product series

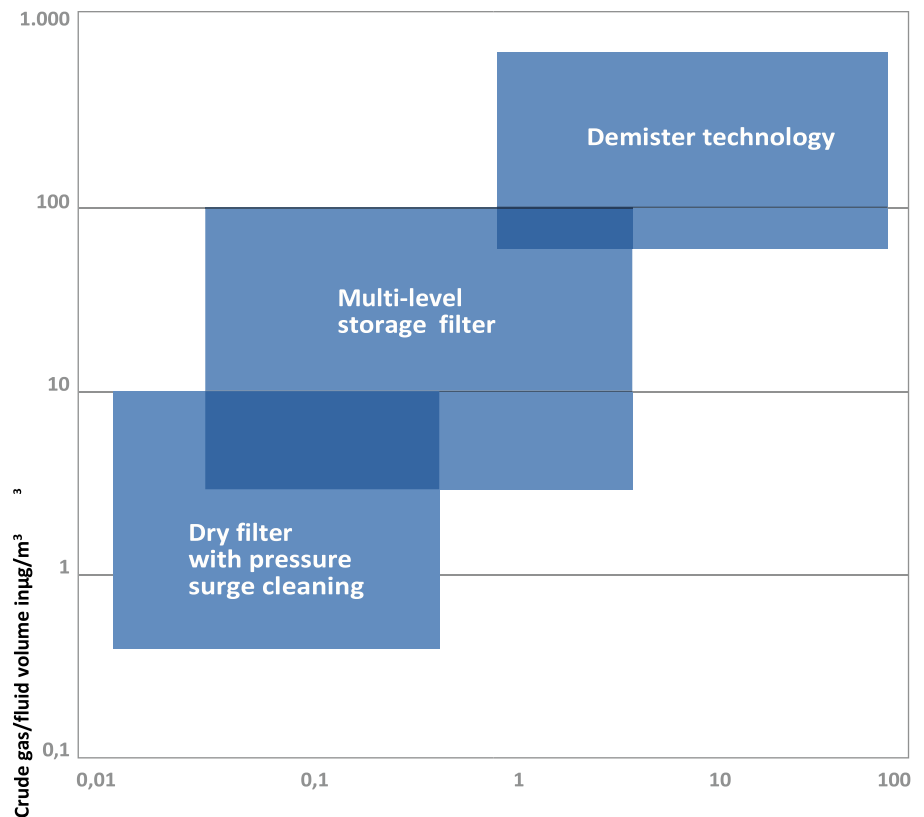

Operating Limits

Filter type	Crude gas concen. Of liquid	Pure gas concen. of liquid	Drop spectrum	Qty of solid matter	Particle size
Demister	> 150 mg/m ³	< 20 mg/m ³	> 2 µm	< 1 g/m ³	> 2 µm
Storage filters	< 150 mg/m ³	< 2 mg/m ³	> 0,3 µm	< 1 g/m ³	> 0,3 µm
Dry filters	< 10 mg/m ³	< 2 mg/m ³	> 0,3 µm	< 100 g/m ³	> 0,3 µm

Quick clamping device

bg filtration oil mist separators work with a quick-clamping device on the filter cartridges; when used for multi-level tasks, a device is also used which ensures a safe seal and simplifies and minimises the cost of maintenance and the replacement of the casettes.

Safety

Precautions such as monitoring the extract air volume, avoiding sources of ignition, monitoring the temperature, having an earthing concept and using fill level sensors in the are used to avoid explosive atmospheres. If such an occurrence cannot be excluded, there is the possibility of also supplying pressure-resistant.

bg filtration gmbh

Voithstr. 5
71272 Renningen, Deutschland
Fon +49 7159 8069-0
Fax +49 7159 7933
Info@bg-filtration.de

Kreissparkasse Böblingen
BLZ 603 501 30
Kto 118174
BIC BKKRDE66
IBAN DE66 6035 0130 0000 118174

HRB 744965
Amtsgericht Stuttgart
Geschäftsführer
Dr. Volker Bauer